



```

exec("bin/l5", "l5", "-l",
      NULL);

params[0] = "l5"
params[1] = "-l"
params[2] = NULL

execv("/bin/l5", params);

```

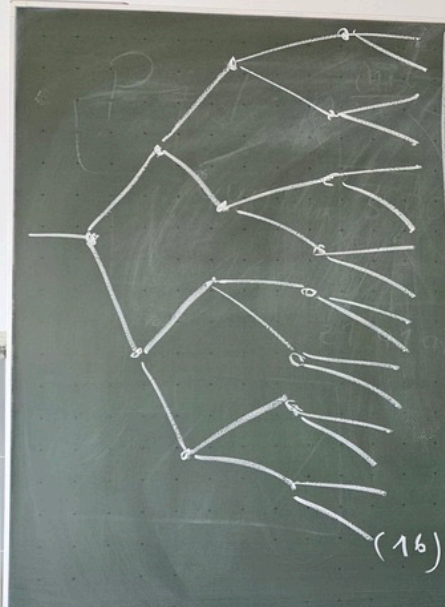

$p1=0$
- [1] -
 $\neq 0$

e)

- [1] -

