


8	16	32	64
A	AX (inkl. AH/AL)	EAX	RAX
B	BX	EBX	RBX
C	CX	ECX	RCX
D	DX	EDX	RDX

Speicherablage

JMP 0x12345678

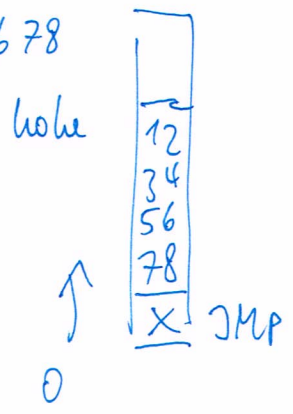

argv Argumente-Vektor

char **argv

- argv[0] Prog.-Name
- argv[1] 1. Argument
- argv[2] 2. Arg.
- ⋮

int argc

int main (int argc,
char **argv) { ... }

Stack

prog arg1 arg2

